



2026-2027

GRAY

SNOWBOARDS

Perfect Guide



gray
snowboards

2026-2027

GRAY



SNOWBOARDS

ADVANCED TECHNOLOGY OF SNOWBOARD DESIGN.

2026-2027 GRAY SNOWBOARDS.

The "FREESTYLE CATEGORY" is a development concept that embodies our philosophy: starting from the fundamental turning performance that forms the basis of snowboarding, we incorporate elements of various riding styles to achieve the optimal riding feel for each category.

GRAY applies its accumulated carving expertise and development capabilities to FREESTYLE CATEGORY board design.

While riding styles and preferences in snowboarding vary, all techniques ultimately originated from speed and high-quality turns. Development riders across each category continuously envision next-level board improvements. Through brainstorming sessions and innovative concepts, these ideas are methodically brought to life throughout the year.

In the "CARVING CATEGORY," we have further refined our innovative metal-and-fiberglass combination construction together with the core profile.

For the 26-27 season, we have expanded the use of 3D molding to even more models.

Not only the shape molds but also the press molds are designed in 3D, enabling us to pursue a more three-dimensional and sophisticated form.

GRAY SNOWBOARDS 2026-2027 LINE UP

You are welcome to test them out at a nearby DEMO event.



GRAY SNOWBOARDS, founded in 1999 with inspiration from surfing and skateboarding, crafts boards that deliver exhilarating, solid turns. Its unique R&D capability has established GRAY as a renowned high-performance snowboard brand. Every element—from outline shapes to camber architecture—evolves through proprietary research and design theories. The 3D molding technology we've been researching for several years captures the shape of a snowboard in three dimensions, enabling a more sculpted structure and form. The boards showcase functional beauty through precisely calculated 3D curves and carefully selected materials. Moreover, every core profile—referring to the thickness balance of the wood core down to 1/100 mm—is designed entirely in-house with our own specifications. GRAY's technology stems from sharp insights, each rigorously tested on snow. Our production spans from high-quality Japanese manufacturing to mature development collaboration with Taiwanese facilities.



Gray Lab Products with the concept of "Engineered with Gray progressive inspiration" are snowboards designed innovative inspiration.

PRODIGY



SINGLE CAMBER



EPIC



ACTIVE CAMBER



LOVEBUZZ 48



SINGLE CAMBER



LOVEBUZZ 58



SINGLE CAMBER



GENIUS



TRICKSTICK[iz]



GENIUS[HV]



SHRED[HV]



LOVEBUZZ 52



LOVEBUZZ 57[Rocker]



LOVEBUZZ 57[Camber]



LOVEBUZZ 62



CUB-X HILL



CUB-X GEO




ENGINEERING & TECHNOLOGY

CONSTRUCTION

All of 2026-2027 models of GRAY SNOWBOARDS has the construction of Sandwiched wood core.








Our original designs select appropriate woods to combine for wood core and give optimal flexibility and lightness for each model.

As the reinforcing materials, not only fiber glass but all new materials "IZANAS®" is used together with Titanal metal and carbon fiber. The combination gives flexibleness and more stiffness in good balance.

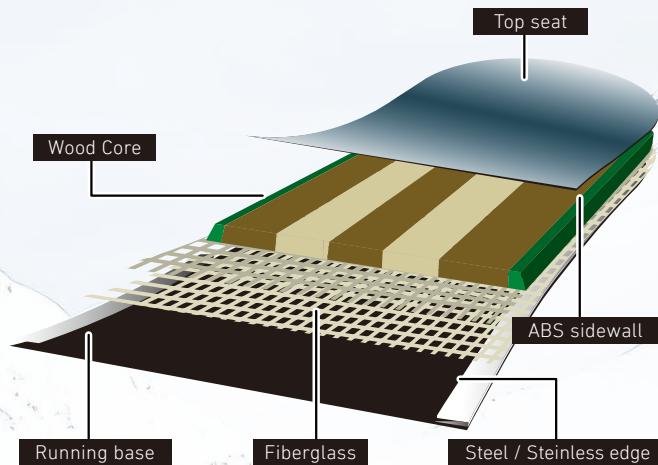


REINFORCEMENT / FIBERGLASS & METAL

- 1ply 1 layer of fiberglass
- 2ply 2 layer of fiberglass
- 3ply 3 layer of fiberglass
- 50/50 Ratio of vertical and horizontal glass fibers
- 65/35 Ratio of vertical and horizontal glass fibers
- IZANAS® "IZANAS®" is an Ultra-High-Strength Polyethylene fiber (UHSPE) with the highest level of strength and elasticity of any organic fiber.
- Titanal Since it has no direction, it exerts its strength in 360 degrees.
- Fiberglass Plate Newly designed fiberglass plate shape designed not to affect board flex or torsion Increased rigidity under bindings for improved stability and edge grip




ARCS GEOMETRY

SINGLE CAMBER

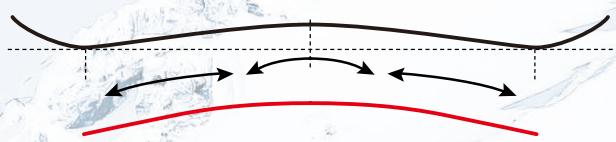


Camber-tech for purely focusing on free-ride. Board center has a tight arc while both ends are with slight arc. This makes more repulsive force when snow-contact-points come closer to the board center with pliancy of the board.

ACTIVE CAMBER

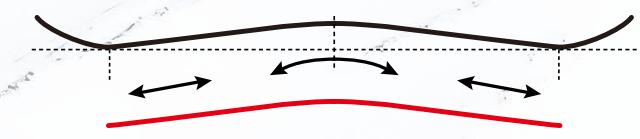


Compared to ordinal Camber, the camber angle to snow-contact-points are slightly flat. This makes snow-contact-points come closer to board center more when weighted, and provides better rotational performance with less pressure at both ends. This is a next generation arc which gives fancy footwork while reasonable camber feeling is reserved underfoot.

VARIO CAMBER

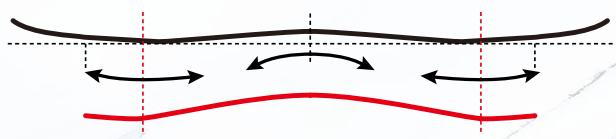

Evolutional arc which enables variable effective edge-length by pressure intensity and edging angulation. Snow-contact-points are set closer to board center and gives better handle-ability in low speed riding. The effective edge-length becoming longer in high speed riding gives stability and high gripping in high speed turning.

HYBRID CAMBER

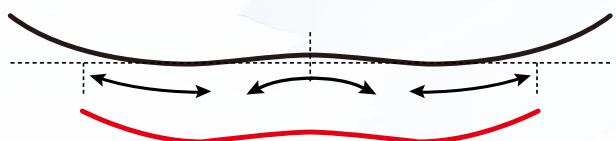

The outside of the board under each foot has a gentle rocker shape, while the space between the feet has a camber, creating a "hybrid arch." The rocker section allows for loose board handling, making it extremely easy to handle in jibbing sections and freestyle tricks. At the same time, the camber between the stances allows for sharp carving with firm edging when the board is angled. It truly combines the best of rocker and camber.

POWDER ROCKER



Rocker arc in overall shape and the apex of arc is located slight closer to tail end. The magic arc enables that nose end of the board is easily lifted when rider weights on his or her bag leg. Not tight arc between snow-contact-points also enables stable riding even on grooming slope.

CORE CONSTRUCTION

Core construction: Structure and combination

Different types of wood have different characters. Meantime, different characteristics are required by sections of snowboard. To make high spec snowboards, it is required to reconcile 2 opposing elements i.e. intensity and lightness in high level. We carefully select best matching materials for each section. A strong wood with high density is used for the section requiring stiffness and a right weight wood is used for the section required lightness. It is one of key unique technology of Gray which is called as "100% wooden complex core" to achieve light and strong.


<input type="checkbox"/> Japanese Cypress	Light but stiff
<input type="checkbox"/> Poplar	Reasonably stiff and light with consistency
<input type="checkbox"/> Japanese Beech	Stiff and strong with high density
<input type="checkbox"/> Paulownia wood	very light with weak structure against pressure
<input type="checkbox"/> Walnut	very light but not so strong
<input type="checkbox"/> Soft maple	light with low density
<input type="checkbox"/> Bamboo	The fibers run vertically, making it flexible and springy.
<input type="checkbox"/> Aspen	Lighter and more uniform than beech.

Super Light Core



Light Maple is used for insert holes section and edge section while main body is made of Walnut. The core is designed for Epic. Combination of the core construction and fiberglass plate realizes high repulsive force even light weight.

Ultra Light Core



Japanese Cypress is widely used along with both side edges while main body is made of Paulownia wood. This core construction is effective to realize light weight but has disadvantage in strength. The disadvantage is covered by fiber glass layers. Combination of siding Paulownia wood and fiber glass gives sufficient repulsiveness and tenaciousness to the snowboard even in the lightest weight.

Paulownia/ Light Poplar Core




Combination of Paulownia and light Poplar makes light & strong wood core.

STD Core II



Soft maple is used for center and both edges sections while Walnut is a base.

Light Poplar Core



Poplar is only material for the core construction. Lightness and strength are well balanced. Giving Quadrax glass on the core profile provides sufficient repulsiveness and tenaciousness to the snowboard in light weight.

Poplar/Bamboo Core



The core is constructed from a combination of lightweight poplar and bamboo. Its spring-like elasticity creates a unique board bounce.

SIDE CUT

Radial Sidecut



A large single arc is used for side cut. The side cut works effectively for any riding style. It supports natural and smooth curving in any situation.

TripleRadius Sidecut



3 of arcs combination is used for side cut. In Gray's production, a small radius arc is set underfoot and 2 larger radius arcs are given both nose and tail ends. It shows quick response at beginning of turning or jib trick, and provides stable edge grip during high speed riding. Release of edge at end of turning or takeoff from kicker can be done smoothly.

MultiRadius Sidecut




Multi-radius side cut consists of 5 arcs. The smallest arc is at the center of snowboard and large arcs are on each side, the largest arcs are at board end. It is special side cut.

SHAPE


Gray snowboards can be categorized in 3 groups by shape of nose & tail and its length.

Directional Shape



Directional shape has clear traveling direction. Slightly long nose can be responsive to any snow conditions. Tail length is relatively shorter so as not to sacrifice switch riding.

Directional Twin Shape



An intermediate shape between Directional shape and Twin shape. Slightly longer nose than tail can enhance ride-ability on powder snow and bad snow condition without sacrificing spinning and switch riding. It can be said the most multi-purpose shape.

Twin Shape




Same shape and same length are given to both nose and tail. No difference is aware between traveling direction and switch riding.

CORE PROFILE

Core profile means thickness of board from nose top to tail end (balance).

3 different types of core profile deliver respective riding feels.

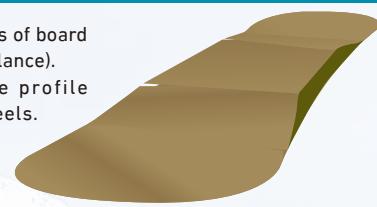

Positive



Thickness of core underfoot is convex. Either end of underfoot is thinner. Rider can feel solidness with the sole of the foot given by thickness of core and can make stabilized turn even at high speed range.

Even



Core between both feet is slightly thinner. It is an intermediate profile between Positive Profile and Negative Profile. Slightly thinner core can make torsion effect which enhances response and realize easy handling as well.

Negative



Core between both feet is significantly thinner. It gives strong torsion effect and the snowboard bows around center of the board. As the result, rider can feel quick response. Rider also can make angulation edging angles differently at front foot and at back foot. The subtle riding technique is very effective for technical riding.

FLEX

Twin Flex



Symmetric flex pattern. Center stance is a basic.

Directional Flex



Stiffer flex is given tail-end side. Set-back stance can be supported by stiff tail.


STIFFNESS

STIFFNESS

3.6 3.8 3.6
N W T


Flex of snowboard is indicated on a scale of 1 to 10. (10 means the most) N-W-T means Nose, Waist and Tail. If scale of Nose and Tail, the snowboard is called Twin Flex. If not, it is considered as Directional Flex.

CONVEX BASE

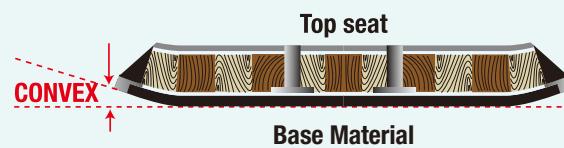

It is important that sole of snowboard should be flat or convex. If it is concave, the snowboard is hard to turn and tough to control. Gray finishes the sole of all our snowboards including Alpine boards with convex shape. Degree of convex is controlled precisely specialized to each model.

STANCE WIDTH & SETBACK

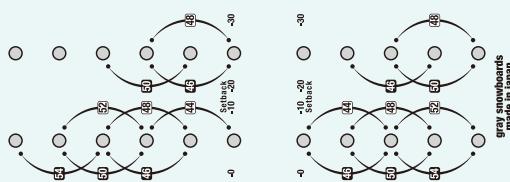

All of Gray snowboards have 2 X 4 cm of insert holes to give flexible stance and set back. No special recommendation for stance and set back is given by Gray because rider's height and preference are varied. We also want riders to make own set back with their preferences. Riding feel changes with set-back. Even the same snowboard, riding feel is totally changed by set-back stance and by center. Gray designs thickness of core to deliver 100% of performance of the snowboard in any binding settings and verifies on the snow test.

PRODIGY



The Prodigy is GRAY's flagship directional twin model for high-speed performance.

A superb model that combines a classic fiberglass-and-carbon construction with our unique hybrid sidecut design, delivering outstanding control and carving performance. Built with a classic sandwich construction, featuring X-shaped carbon rovings beneath the wood core and fiberglass layers on both sides. Combining the lively flex of fiberglass with quick rebound performance, it delivers a highly responsive ride. While maintaining near-twin outline balance, the flex pattern features a slightly stiffer tail, offering easy handling at low speeds and stability at medium to high speeds. Versatile performance from superpipe to big kickers and to high-speed all-mountain freeriding.

MODEL	PRODIGY 46.5	PRODIGY 51.5	PRODIGY 51.5w	PRODIGY 53.5	PRODIGY 55.5	PRODIGY 55.5w	PRODIGY 57.5	PRODIGY 57.5w
Overall Length	1465	1515	1515	1535	1555	1555	1575	1575
Effective Edge L.	1140	1180	1180	1200	1220	1220	1240	1240
Contact Length	1090	1140	1140	1160	1180	1180	1200	1200
Waist Width	234	242	250	244	246	254	246	258
Sidecut Radius	7800/6880/7800	8200/7180/8200	8200/7180/8200	8700/7880/8700	9020/8080/9020	9020/8080/9020	9100/8200/9100	9100/8200/9100
Sidecut Offset	0	0	0	0	0	0	0	0
Nose Length	195.0	195.0	195.0	195.0	195.0	195.0	195.0	195.0
Nose Width	275.0	285.0	293.0	285.0	287.0	295.0	288.0	300.0
Nose Height	47.7	45.5	45.5	45.5	45.5	45.5	45.5	45.5
Tail Length	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0
Tail Width	275.0	285.0	293.0	285.0	287.0	295.0	288.0	300.0
Tail Height	40.8	38.9	38.9	38.9	38.9	38.9	38.9	38.9
Camber	8.0	10.0	10.0	10.0	10.0	10.0	12.0	12.0
Rocker	---	---	---	---	---	---	---	---
Stance Width	460-560	460-580	460-580	480-600	500-620	500-620	500-620	500-620
Insert Quantity	10+12	12+12	12+12	12+12	12+12	12+12	12+12	12+12
Stance Setback	10	20	20	20	20	20	20	20
Edge	1.8mm/stainless							
Sidewall Angle	25°	25°	25°	25°	25°	25°	25°	25°
Sidewall Color	BLACK	BLACK	GREY	BLACK	BLACK	GREY	BLACK	GREY
Running Base	IS 7500 Graphite							
Stiffness	4.8 6.3 5.3 N W T	5.5 7.0 6.0 N W T	5.5 7.0 6.0 N W T	6.0 7.5 6.5 N W T	6.5 8.0 7.0 N W T	6.5 8.0 7.0 N W T	7.0 8.5 7.5 N W T	7.0 8.5 7.5 N W T



GENIUS



A mid-flex twin model optimized for aerial competitions, from kicker jumps to slopestyle. In the 26-27 season, the 157w is added as the wide version of the 155.

A camber full twin design featuring a long effective edge and compact tip outline. Through its fine-tuned flex balance, GENIUS achieves superior stability for takeoffs and landings. The model successfully fuses contradicting freestyle elements at a high level - delivering stable carving performance during freeriding while maintaining freestyle capability.

MODEL	GENIUS 40	GENIUS 44	GENIUS 49	GENIUS 52	GENIUS 55	GENIUS 57w
Overall Length	1400	1440	1490	1520	1550	1570
Effective Edge L.	1090	1130	1170	1200	1230	1230
Contact Length	1040	1080	1120	1150	1180	1180
Waist Width	235	238	246	248	250	262
Sidecut Radius	7800/7500/7200/ 7500/7800	8200/7900/7600/ 7900/8200	8600/8300/8000/ 8300/8600	8800/8500/8200/ 8500/8800	9000/8700/8400/ 8700/9000	9000/8700/8400/ 8700/9000
Sidecut Offset	0	0	0	0	0	0
Nose Length	180.0	180.0	185.0	185.0	185.0	195.0
Nose Width	273.0	277.0	286.0	289.0	292.0	304.0
Nose Height	45.4	45.4	46.9	46.9	46.9	52.9
Tail Length	180.0	180.0	185.0	185.0	185.0	195.0
Tail Width	273.0	277.0	286.0	289.0	292.0	304.0
Tail Height	45.4	45.4	46.9	46.9	46.9	52.9
Camber	8.0	8.0	10.0	10.0	12.0	12.0
Rocker	---	---	---	---	---	---
Stance Width	440-560	440-560	500-620	520-640	520-640	540-660
Insert Quantity	12+12	12+12	12+12	12+12	12+12	12+12
Stance Setback	0	0	0	0	0	0
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°	25°
Sidewall Color	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK
Running Base	IS R2118 / IS 7200 wt					
Stiffness	2.5 3.5 2.5 N W T	3.5 4.5 3.5 N W T	4.5 5.5 4.5 N W T	5.0 6.0 5.0 N W T	5.5 6.5 5.5 N W T	5.8 6.8 5.8 N W T



FEATURES OF THE 26-27 MODEL

- *WIDE versions: 51.5, 55.5, and 57.5
- *Fiberglass and carbon roving composite construction
- *Advanced STD CORE II
- *1.8mm high carbon stainless steel edges
- *Progressive triple sidecut design
- *Die-cut base design



FEATURES OF THE 26-27 MODEL

- *newly added 157 as a wide version of 155
- *Full twin shape with twin flex
- *High carbon stainless steel edges
- *Progressive 5-radius sidecut design
- *IS R2118 graphite base
- *Die-cut base design

EPIC



A premium full twin model featuring an active camber profile. With mid-flex construction, this versatile model excels across disciplines, from jibbing to slopestyle.

The active camber combines an advanced hybrid design with a gentle reverse-radius camber near the nose and tail contact points. This reduced edge contact delivers an intuitive snow feel and enhanced maneuverability. The synergy between active camber and multi-sidecut design (aggressive radius between feet) creates an optimal balance of control and powerful edge grip underfoot.

MODEL	EPIC 38	EPIC 41	EPIC 44	EPIC 48	EPIC 51	EPIC 54	EPIC 57
Overall Length	1380	1410	1440	1480	1510	1540	1570
Effective Edge L.	1100	1120	1140	1170	1190	1220	1250
Contact Length	1050	1070	1090	1120	1140	1160	1200
Waist Width	230	234	238	244	248	250	252
Sidecut Radius	7400/6600/7400/ 7400	7600/6800/ 7600	7800/7000/ 7800	8400/7400/ 8400	8600/7600/ 8600	8800/7800/ 8800	9200/8200/ 9200
Sidecut Offset	0	0	0	0	0	0	0
Nose Length	165.0	170.0	175.0	180.0	185.0	190.0	185.0
Nose Width	270.0	275.0	279.0	285.0	289.0	292.0	294.0
Nose Height	34.4	36.5	38.3	38.9	41.2	43.2	41.2
Tail Length	165.0	170.0	175.0	180.0	185.0	190.0	185.0
Tail Width	270.0	275.0	279.0	285.0	289.0	292.0	294.0
Tail Height	34.4	36.5	38.3	38.9	41.2	43.2	41.2
Camber	7.0	7.0	7.0	8.0	8.0	8.0	10.0
Rocker	---	---	---	---	---	---	---
Stance Width	460-540	460-540	480-560	480-600	500-620	520-640	540-660
Insert Quantity	10+10	10+10	10+10	12+12	12+12	12+12	12+12
Stance Setback	0	0	0	0	0	0	0
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°	25°	25°
Sidewall Color	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK
Running Base	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural
Stiffness	3.1 3.3 3.1 N W T	3.3 3.5 3.3 N W T	3.6 3.8 3.6 N W T	4.3 4.5 4.3 N W T	4.8 5.0 4.8 N W T	5.2 5.4 5.2 N W T	5.5 5.7 5.5 N W T



38 / 44 / 51 / 57 41 / 48 / 54

FEATURES OF THE 26-27 MODEL

- * Active camber profile
- * Ultralight core with a mesh fiberglass plate
- * 1.8mm high carbon stainless steel edges
- * IS7500 sintered base
- * Printed base design

TRICKSTICK[iz]



A model specifically engineered for ground tricks, featuring generous amounts of Toyobo's IZANAS® Ultra-High-Strength Polyethylene fiber under the core to achieve enhanced response and rebound.

TRICKSTICK's ground trick focus continues to evolve. To maximize ollie power from the tips, we've developed a flex pattern that balances board flex with rebound. The strategic placement of Toyobo's IZANAS® between the stance and under the tip core creates a new dimension of flex and snap. Combined with active camber, this delivers both maneuverability and pop.

MODEL	TRICKSTICK iz 38	TRICKSTICK iz 41	TRICKSTICK iz 44	TRICKSTICK iz 48	TRICKSTICK iz 51	TRICKSTICK iz 54
Overall Length	1380	1410	1440	1480	1510	1540
Effective Edge L.	1100	1120	1140	1170	1190	1220
Contact Length	1050	1070	1090	1120	1140	1160
Waist Width	230	234	238	244	248	250
Sidecut Radius	7400/6600/7400/ 7600/6800/7600	7800/7000/7800	8400/7400/8400	8600/7600/8600	8800/7800/8800	
Sidecut Offset	0	0	0	0	0	0
Nose Length	165.0	170.0	175.0	180.0	185.0	190.0
Nose Width	270.0	275.0	279.0	285.0	289.0	292.0
Nose Height	34.4	36.5	38.3	38.9	41.2	43.2
Tail Length	165.0	170.0	175.0	180.0	185.0	190.0
Tail Width	270.0	275.0	279.0	285.0	289.0	292.0
Tail Height	34.4	36.5	38.3	38.9	41.2	43.2
Camber	7.0	7.0	7.0	8.0	8.0	8.0
Rocker	---	---	---	---	---	---
Stance Width	420-500	430-510	440-520	480-560	500-580	520-600
Insert Quantity	10+10	10+10	10+10	10+10	10+10	10+10
Stance Setback	0	0	0	0	0	0
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°	25°
Sidewall Color	WHITE	BLACK	WHITE	WHITE	BLACK	WHITE
Running Base	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural	IS 7500 Natural
Stiffness	2.9 3.0 2.9 N W T	3.1 3.2 3.1 N W T	3.4 3.5 3.4 N W T	4.1 4.2 4.1 N W T	4.6 4.7 4.6 N W T	5.0 5.1 5.0 N W T



26-27 MODEL FUNCTION

- * Toyobo's IZANAS® UHSPE fiber placement
- * Optimized ground tricks flex pattern
- * Ultralight core with a mesh fiberglass plate
- * 1.8 mm high carbon stainless steel edges
- * IS7500 sintered base
- * Die-cut base design

GENIUS [HV]

The "GENIUS [HV]" features a hybrid camber profile optimized for ground trick performance.

This hybrid full twin is developed for ground tricks, combining the GENIUS outline's "long effective edge and short tip" with a gentle rocker outside the feet and camber between stances. With a slightly softer flex than the camber version, it's a high-performance board suited for ground tricks from beginner to advanced level.

MODEL	GENIUS HV 40	GENIUS HV 44	GENIUS HV 49	GENIUS HV 52
Overall Length	1400	1440	1490	1520
Effective Edge L.	1090	1130	1170	1200
Contact Length	1040	1080	1120	1150
Waist Width	235	238	246	248
Sidecut Radius	7800/7500/7200/ 7500/7800	8200/7900/7600/ 7900/8200	8600/8300/8000/ 8300/8600	8800/8500/8200/ 8500/8800
Sidecut Offset	0	0	0	0
Nose Length	180.0	180.0	185.0	185.0
Nose Width	273.0	277.0	286.0	289.0
Nose Height	45.4	45.4	46.9	46.9
Tail Length	180.0	180.0	185.0	185.0
Tail Width	273.0	277.0	286.0	289.0
Tail Height	45.4	45.4	46.9	46.9
Camber	8.0	8.0	10.0	10.0
Rocker	---	---	---	---
Stance Width	440-560	440-560	500-620	520-640
Insert Quantity	12+12	12+12	12+12	12+12
Stance Setback	0	0	0	0
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°
Sidewall Color	BLACK	BLACK	BLACK	BLACK
Running Base	IS 7700 Natural	IS 7700 Natural	IS 7700 Natural	IS 7700 Natural
Stiffness	2.8 3.3 2.8 N W T	3.5 4.0 3.5 N W T	4.0 4.5 4.0 N W T	4.3 4.8 4.3 N W T



FEATURES OF THE 26-27 MODEL

- * HYBRID CAMBER profile for ground tricks
- * ULTRA-LIGHT CORE Construction
- * Full twin shape with twin flex
- * 1.8mm high carbon stainless steel edges
- * Progressive 5-radius sidecut design
- * High-transparency IS 7700 UHMW base
- * Printed base Design

SHRED [HV]

The newly designed Hybrid Camber (Camber & Rocker) combined with a precisely shaped 3D-molded convex base delivers an exceptional balance of smooth ground tricks and powerful freeriding.

Evolved into a hybrid camber-and-rocker profile, the SHRED features a subtle rocker outside the bindings and a camber zone between them. The camber section ensures reliable edge hold and easy carving control, while the rockered zones enhance maneuverability for ground tricks. Its flattened contact area increases press stability, allowing precise foot control during press moves. Blending the best of camber and rocker, this all-around ground trick model offers versatility and responsive performance across all terrains.

MODEL	SHRED HV 40	SHRED HV 44	SHRED HV 48	SHRED HV 52	SHRED HV 56
Overall Length	1400	1440	1480	1520	1560
Effective Edge L.	1080	1120	1150	1190	1230
Contact Length	700	740	780	820	860
Waist Width	234	238	246	248	250
Sidecut Radius	6400	6600	7400	7600	7800
Sidecut Offset	0	0	0	0	0
Nose Length	180.0	180.0	180.0	180.0	180.0
Nose Width	276.0	282.0	288.0	290.0	294.0
Nose Height	35.5	35.5	35.5	35.5	35.5
Tail Length	180.0	180.0	180.0	180.0	180.0
Tail Width	276.0	282.0	288.0	290.0	294.0
Tail Height	35.5	35.5	35.4	35.5	35.5
Camber	6.0	6.5	7.0	7.5	8.0
Rocker	2.0	2.0	2.0	2.0	2.0
Stance Width	420-500	440-520	480-560	500-580	520-600
Insert Quantity	10+10	10+10	10+10	10+10	10+10
Stance Setback	0	0	0	0	0
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°
Sidewall Color	PINK	PURPLE	BLUEGREEN	NEON GREEN	PURPLE
Running Base	P-TEX3000 Graphite				
Stiffness	2.5 3.0 2.5 N W T	3.3 3.8 3.3 N W T	4.8 5.3 4.8 N W T	5.3 5.8 5.3 N W T	6.0 6.5 6.0 N W T



FEATURES OF THE 26-27 MODEL

- * Poplar wood core with fiberglass construction
- * Hybrid Camber (Camber & Rocker)
- * Full twin shape with twin ground-trick flex
- * 1.8mm high carbon stainless steel edges
- * P-tex 3000 Graphite
- * Die-cut base design



CUB-X[HILL]

CUB-X is a high-performance model engineered for kids and youth riders. It features a deep sidecut and narrow profile with a soft twin flex optimized for lighter riders.

Extensively tested by young riders across disciplines - from halfpipe to slopestyle and technical carving - this versatile twin model delivers all-around performance. All sizes except 136cm feature offset inserts for optimal boot centering. The sintered base delivers high speed and durability, making it suitable even for summer slopes.

MODEL	Cub X 104 HILL	Cub X 114 HILL	Cub X 124 HILL	Cub X 132 HILL	Cub X 136 HILL
Overall Length	1040	1140	1240	1320	1360
Effective Edge L.	800	866	960	1020	1060
Contact Length	760	826	920	964	1009
Waist Width	192	198	212	218	222
Sidecut Radius	3800	4400	5400	6200	6800
Sidecut Offset	0	0	0	0	0
Nose Length	140.0	157.0	160.0	178.0	175.5
Nose Width	230.0	236.0	250.0	252.0	259.0
Nose Height	32.6	40.8	42.1	52.2	50.4
Tail Length	140.0	157.0	160.0	178.0	175.5
Tail Width	230.0	236.0	250.0	252.0	259.0
Tail Height	32.6	40.8	42.1	52.2	50.4
Camber	4.0	4.5	5.0	6.0	7.0
Rocker	---	---	---	---	---
Stance Width	320-400	360-440	400-480	420-500	440-520
Insert Quantity	10+10	10+10	10+10	10+10	10+10
Stance Setback	0	0	0	0	0
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°
Sidewall Color	NEON GREEN	ORANGE	PURPLE	BLUEGREEN	ROSE PINK
Running Base	P-TEX3000 Natural				
Stiffness	1.5 2.0 1.5 N W T	1.8 2.3 1.8 N W T	2.2 2.7 2.2 N W T	2.5 3.0 2.5 N W T	2.8 3.3 2.8 N W T



FEATURES OF THE 26-27 MODEL

- * All-purpose single camber profile
- * Narrow profile optimized for youth boot sizes
- * 1.8mm high carbon stainless steel edges
- * P-TEX 3000 sintered natural (print)
- ★ All sizes except 136cm feature offset inserts for optimal boot centering

CUB-X[GEO]

CUB-X [GEO] retains the same outline shape while adopting a 3D-molded construction, evolving into an even more rider-friendly model thanks to its solid convex base design.

Developed and tested by kids' riders in halfpipe, slopestyle, and carving, this true twin delivers all-around performance and easy control. Except for the 136cm size, the inserts are offset for easier boot centering, another key feature of the CUB-X series. In addition, the topsheet now uses polyamide material, dramatically improving vibration absorption and overall riding comfort.

MODEL	Cub X 104 GEO	Cub X 114 GEO	Cub X 124 GEO	Cub X 132 GEO	Cub X 136 GEO
Overall Length	1040	1140	1240	1320	1360
Effective Edge L.	800	866	960	1020	1060
Contact Length	760	826	920	964	1009
Waist Width	192	198	212	218	222
Sidecut Radius	3800	4400	5400	6200	6800
Sidecut Offset	0	0	0	0	0
Nose Length	140.0	157.0	160.0	178.0	175.5
Nose Width	230.0	236.0	250.0	252.0	259.0
Nose Height	32.6	40.8	42.1	52.2	50.4
Tail Length	140.0	157.0	160.0	178.0	175.5
Tail Width	230.0	236.0	250.0	252.0	259.0
Tail Height	32.6	40.8	42.1	52.2	50.4
Camber	4.0	4.5	5.0	6.0	7.0
Rocker	---	---	---	---	---
Stance Width	320-400	360-440	400-480	420-500	440-520
Insert Quantity	10+10	10+10	10+10	10+10	10+10
Stance Setback	0	0	0	0	0
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°
Sidewall Color	BLACK	BLACK	BLACK	BLACK	BLACK
Running Base	P-TEX3000 Graphite				
Stiffness	1.5 2.0 1.5 N W T	1.8 2.3 1.8 N W T	2.2 2.7 2.2 N W T	2.5 3.0 2.5 N W T	2.8 3.3 2.8 N W T



26-27 MODEL FUNCTION

- * All-purpose single camber profile
- * Narrow profile optimized for youth boot sizes
- * 1.8mm high carbon stainless steel edges
- * Polyamide topsheet
- * P-TEX 3000 Graphite (die-cut)
- ★ All sizes except 136cm feature offset inserts for optimal boot centering

CUB-X 104, 114, 124, and 132 (except 136) feature offset inserts, which make it easier to correctly align the boot center that tends to shift toward the heel side in conventional setups. Since the CUB-X is a true twin shape with a true twin flex, it performs identically regardless of which end you ride as the nose. Both regular and goofy riders can simply reverse the board's direction for their stance preference. By focusing on proper boot centering and setback adjustment, the CUB-X offers smoother turn initiation and precise board control.

CUB-X 104, 114, and 124 are designed specifically for one-piece boots (integrated outer and inner construction). Two-piece boots are not recommended, as they tend to overhang the board edges. We recommend one-piece BOA-type boots from HEAD, RASTARS, or SPOON. For bindings, we suggest compact-base models such as SPOON, particularly two-strap types, for optimal fit and performance.

LOVEBUZZ


The LOVEBUZZ series is an all-terrain series for all-mountain free-carving.

The LOVEBUZZ series is an all-mountain freeriding series that encourages "fun-to-ride" on the natural terrain of the entire mountain. Each model features a distinct camber profile and outline shape, engineered for performance on groomed runs and natural terrain including slopes and gullies.

LOVEBUZZ 48



made in
TAIWAN
PM



The 148 is a women's model from LOVEBUZZ. With a low camber, a long nose with a large sidecut radius, and a crescent tail shape. This model has versatile performance from on-piste freeriding to powder.

LOVEBUZZ 52



made in
TAIWAN
PM



The 152 is a short model for men. With its low camber, long nose with large sidecut radius, and crescent tail shape, LOVEBUZZ 152 is a free-running model with a versatile performance from on-piste free runs to powder.

LOVEBUZZ 57 [Rocker]



made in
JAPAN
AG



The All-Mountain Cruiser is designed for exceptional groomed snow performance despite a powder rocker profile. The reduced sidecut taper enhances carving capability.

LOVEBUZZ 57 [Camber]



made in
JAPAN
AG



The newly developed 157 camber prioritizes carving performance on groomed runs, with exceptional edge control on groomed terrains.

LOVEBUZZ 58



made in
TAIWAN
PM



The 158 is a standard length for men. With its low camber, large sidecut radius, long nose, and crescent tail shape, LOVEBUZZ 158 is a free-run model with a versatile performance from on-piste free runs to powder.

LOVEBUZZ 62



made in
TAIWAN
PM



The 162 is a longer men's model. With its low camber, large sidecut radius, long nose, and crescent tail shape, LOVEBUZZ 162 is a free-run model with a versatile performance from on-piste free runs to powder.

MODEL	LOVEBUZZ 48	LOVEBUZZ 52	LOVEBUZZ 57 [ROC]	LOVEBUZZ 57 [CAM]	LOVEBUZZ 58	LOVEBUZZ 62
Overall Length	1480	1520	1570	1570	1580	1620
Effective Edge L.	1160	1180	1290	1290	1240	1270
Contact Length	1100	1120	1240	1240	1180	1210
Waist Width	240	250	251	251	254	260
Sidecut Radius	8800/7800/8400	9200/8200/8800	9200/8800/8400/9000/9600	9200/8800/8400/9000/9600	9900/8900/9500	10200/9200/9800
Sidecut Offset	-80	-80	-20	-20	-80	-80
Nose Length	260	280	245	245	280	290
Nose Width	286	296	300	300	300	306
Nose Height	47.8	48.7	65.5	65.5	48.7	52.1
Tail Length	120	120	85	85	120	120
Tail Width	268	278	293	293	282	290
Tail Height	20.4	20.4	21.8	21.8	20.4	20.4
Camber	5	6	---	6	7	7
Rocker	---	---	6	---	---	---
Stance Width	440-560	460-580	500-620	500-620	500-620	500-620
Insert Quantity	12+12	12+12	12+12	12+12	12+12	12+12
Stance Setback	40	40	55	55	40	40
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°	25°
Sidewall Color	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK
Running Base	P-TEX3000 Graphite	P-TEX3000 Graphite	IS R2118	IS R2118	P-TEX3000 Graphite	P-TEX3000 Graphite
Stiffness	6.0 N 7.0 W 6.8 T	6.5 N 7.5 W 7.3 T	7.2 N 8.0 W 7.6 T	7.2 N 8.0 W 7.6 T	7.5 N 8.5 W 8.0 T	7.8 N 8.8 W 8.3 T

ENGINEERING & TECHNOLOGY

The 26-27 Carving Category features a highly refined and matured lineup.

The SONICALMACH LT, developed using technology derived from the MACH series, is an intermediate-level run & trick model built with a 3D mold.

This season, the long-awaited ver.C, equipped with carbon beneath the core, joins the SONICALMACH LT family.


The Type-X, a pure competition model derived from the Type-R, is now offered in ver.S, which features a sintered top sheet.

For the Type-R V, VI, and VII longboard series, new EW (extra-wide) versions have been added.

The DESPE WOOD series now features a newly designed Active Camber across all lengths, with the highly anticipated wide models introduced for the 58 and 62 sizes.


CONSTRUCTION

SONICALMACH [46, 51, 54, 55w]

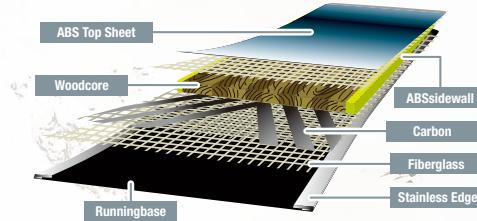


- X-shaped carbon roving placed beneath the core
- ABS Top Sheet
- Stainless steel edges

SONICALMACH LT [46, 51, 52w, 54, 55w, 56ew, 60w, 61ew]

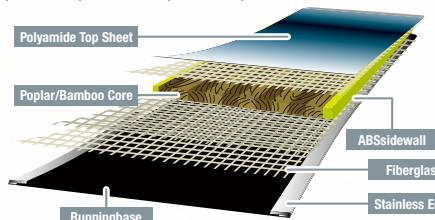


- Hybrid core of bamboo and lightweight poplar
- Polyamide Top Sheet
- Stainless steel edges

DSPRD Ti type-X ver.S

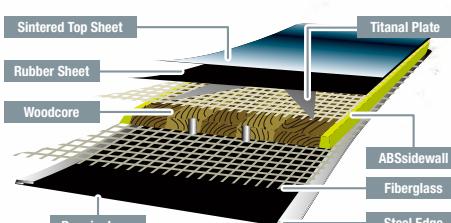


- 0.4 mm titanal in an X-shape inserted beneath the Top Sheet
- ver.S: Sintered Top Sheet
- Steel edges with a hardness rating of 48

SONICALMACH [54ver.C, 55wver.C, 58, 60w, 63w]

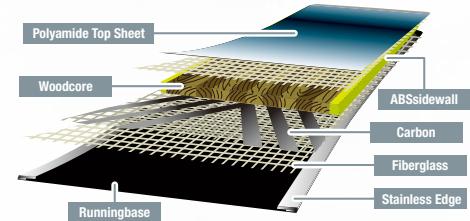


- X-shaped carbon roving placed beneath the core
- Polyamide Top Sheet
- Stainless steel edges

SONICALMACH LT ver.C [54ver.C, 55w ver.C, 56ew ver.C]

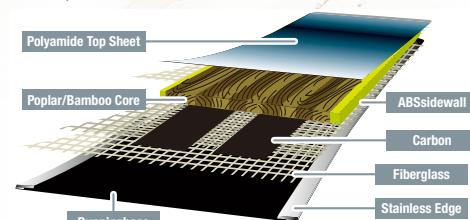


- Carbon strips loaded beneath the core
- Hybrid core of bamboo and lightweight poplar
- Polyamide Top Sheet
- Stainless steel edges

DSPRD Ti type-X ver.P

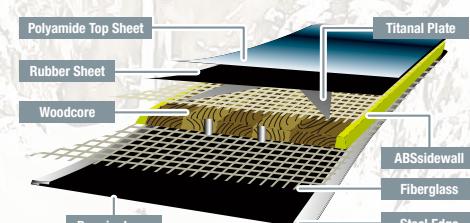


- 0.4 mm titanal in an X-shape inserted beneath the Top Sheet
- ver.P: Polyamide Top Sheet
- Steel edges with a hardness rating of 48

DSPRD Ti type-R

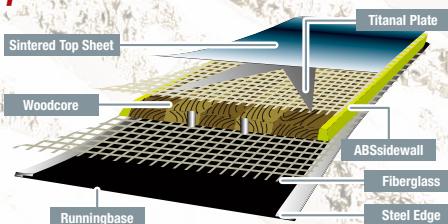


- 0.4 mm titanal in an X-shape inserted beneath the Top Sheet
- Sintered Top Sheet
- Steel edges with a hardness rating of 48

DSPRD Ti [iz]

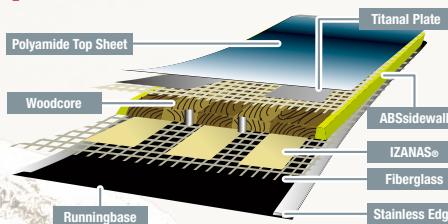


- Ultra-High-Strength Polyethylene fiber "IZANAS" loaded beneath the core
- Polyamide Top Sheet
- Stainless steel edges

DSPRD (micro, mini)

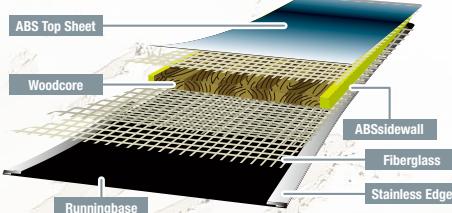


- Full fiberglass sandwich construction
- 0.5 mm ABS Top Sheet
- Stainless steel edges

DESPE WOOD

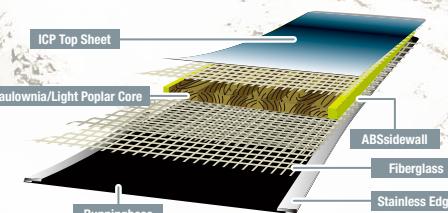


- Full fiberglass sandwich construction
- 100% lightweight poplar core (32,38,43)
- Paulownia-lightweight poplar composite core (except 32,38,43)
- 0.5 mm ICP Top Sheet
- Stainless steel edges

QUADRA II / QUADRA [63, 85]

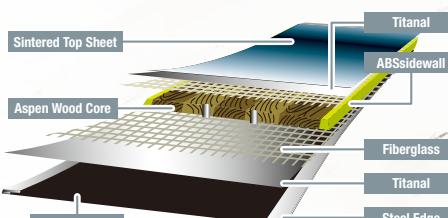


- Full metal sandwich construction with 0.4 mm titanal on top and bottom
- Sintered Top Sheet
- Steel edges with a hardness rating of 48

QUADRA [57, 72]

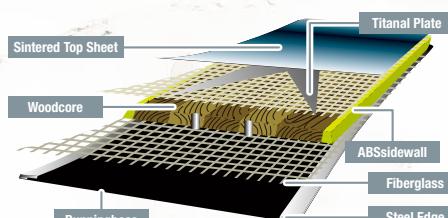


- 0.4 mm titanal in an X-shape inserted beneath the Top Sheet
- Sintered Top Sheet
- Steel edges with a hardness rating of 48

TYCOON Type-S [iz]

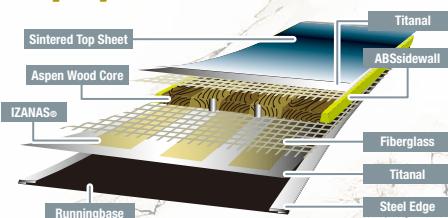


- Full metal sandwich construction with 0.4 mm titanal on top and bottom
- Ultra-High-Strength Polyethylene fiber "IZANAS" loaded beneath the core
- Sintered Top Sheet
- Steel edges with a hardness rating of 48

TYCOON

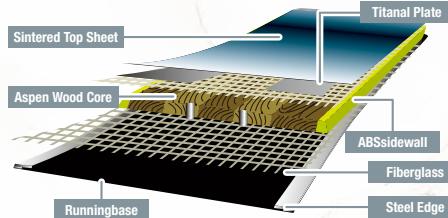

- 0.4 mm titanal ribbon sheet inserted beneath the top sheet along the upper edge
- Sintered Top Sheet
- Steel edges with a hardness rating of 48

FORCE

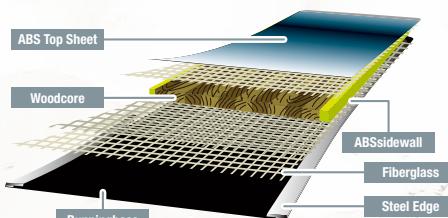

- Full fiberglass sandwich construction
- 0.5 mm ABS Top Sheet
- Steel edges with a hardness rating of 48

SONICALMACH 46, 51, 54, 55w

The Sonical Mach series achieves quick response with dynamic flex through carbon placement beneath the core.

The 46, 51, 54, and 55w models are engineered for carving & ground tricks at low to mid speeds. These premium models establish a new riding style that emphasizes ground tricks while delivering quality carving performance. Starting with excellent maneuverability at low speeds, they maintain enhanced stability for mid-speed trick execution.

MODEL	SONICALMACH 46	SONICALMACH 51	SONICALMACH 54	SONICALMACH 55w
Overall Length	1460	1510	1540	1550
Effective Edge L.	1140	1190	1220	1220
Contact Length	1090	1140	1180	1180
Waist Width	240	248	250	260
Sidecut Radius	7600/7200/7800	8400/8000/8600	8700/8300/9000	8700/8300/9000
Sidecut Offset	-15	-15	-15	-15
Nose Length	190.0	190.0	185.0	190.0
Nose Width	283.0	290.0	293.0	303.0
Nose Height	45.4	43.2	41.0	43.2
Tail Length	180.0	180.0	175.0	180.0
Tail Width	278.0	285.0	288.0	298.0
Tail Height	40.8	38.9	36.8	38.9
Camber	6.0	6.0	6.0	6.0
Rocker	---	---	---	---
Stance Width	440-560	480-600	480-600	480-600
Insert Quantity	12+12	12+12	12+12	12+12
Stance Setback	5	5	5	5
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°
Sidewall Color	NEON RED	NEON RED	NEON RED	NEON RED
Running Base	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite
Stiffness	4.0 5.2 4.1 N W T	5.0 6.2 5.1 N W T	6.5 7.6 6.6 N W T	6.5 7.6 6.6 N W T



FEATURES OF THE 26-27 MODEL

- * Directional shape with progressive triple sidecut design
- * X-shaped carbon configuration for quick response
- * ABS topsheet for enhanced stability on variable terrain
- * 12+12 inserts for a wide range of stance width adjustability
- * 1.8mm stainless steel edges

SONICALMACH 54ver.C, 55wver.C, 58, 60w, 63w

The 54 ver.C, 55w ver.C, 58, 60w, and 63w models are engineered for carving & ground tricks at high speeds.

A polyamide topsheet complements carbon's responsive character with superior shock absorption. The multi-sidecut design delivers high-level carving performance with near-twin flex balance. "Version C" models feature optimized flex for carving compared to standard 54 and 55 models, adapting seamlessly to higher speeds. This high-performance design creates distinctive responsiveness through its polyamide topsheet and carbon ribbon combination. These stand as the flagship carving models in the Sonical Mach series.

MODEL	SONICALMACH 54 ver.C	SONICALMACH 55w ver.C	SONICALMACH 58	SONICALMACH 60w	SONICALMACH 63w
Overall Length	1540	1550	1580	1600	1630
Effective Edge L.	1220	1220	1245	1255	1290
Contact Length	1180	1180	1200	1200	1230
Waist Width	250	260	252	262	256
Sidecut Radius	8700/8300/9000	8700/8300/9000	9400/8900/9800	9800/9300/10200	9100/9960
Sidecut Offset	-15	-15	-20	-20	-45
Nose Length	185.0	190.0	205.0	215.0	215.0
Nose Width	293.0	303.0	295.0	304.0	303.0
Nose Height	41.0	43.2	50.2	55.1	55.1
Tail Length	175.0	180.0	175.0	185.0	185.0
Tail Width	288.0	298.0	288.0	297.0	288.0
Tail Height	36.8	38.9	36.8	41.0	41.0
Camber	6.0	6.0	8.0	8.0	10.0
Rocker	---	---	---	---	---
Stance Width	480-600	480-600	500-620	500-620	500-620
Insert Quantity	12+12	12+12	12+12	12+12	12+12
Stance Setback	15	15	25	25	35
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°
Sidewall Color	NEON RED	NEON RED	NEON RED	NEON RED	NEON RED
Running Base	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite
Stiffness	6.8 8.0 7.0 N W T	6.8 8.0 7.0 N W T	7.2 8.4 7.4 N W T	7.2 8.4 7.4 N W T	7.5 8.8 7.8 N W T



FEATURES OF THE 26-27 MODEL

- * Directional shape with progressive triple sidecut design
- * X-shaped carbon configuration for quick response
- * ABS topsheet for enhanced stability on variable terrain
- * 12+12 inserts for a wide range of stance width adjustability
- * 1.8mm stainless steel edges





SONICALMACH LT

A run & trick model that delivers quick rebound thanks to its poplar + bamboo wood core, despite its soft-flex design.

The 46, 51, and 52W sizes feature a true twin shape, tuned slightly more toward trick performance within the run & trick category. The 54, 55W, and 56EW models use a directional twin shape, offering the most balanced blend of smooth riding and trick capability. Meanwhile, the 60W and 61EW models lean more toward high-speed runs, with a directional shape and setback stance that bring out a faster, more aggressive riding style.

MODEL	SONICALMACH LT 46	SONICALMACH LT 51	SONICALMACH LT 52W	SONICALMACH LT 54	SONICALMACH LT 55W	SONICALMACH LT 56ew	SONICALMACH LT 60W	SONICALMACH LT 61ew
Overall Length	1460	1510	1520	1540	1550	1560	1600	1610
Effective Edge L.	1140	1180	1180	1220	1220	1220	1260	1260
Contact Length	1090	1140	1140	1180	1180	1180	1220	1220
Waist Width	240	248	256	250	260	270	262	272
Sidecut Radius	7600/7200/ 7600	8400/8000/ 8400	8400/8000/ 8400	8700/8300/ 8700	8700/8300/ 8700	8700/8300/ 8700	9800/9200/ 10200	9800/9200/ 10200
Sidecut Offset	0	0	0	0	0	0	20	20
Nose Length	185.0	185.0	190.0	190.0	195.0	200.0	205.0	210.0
Nose Width	281.0	288.0	296.0	291.0	301.0	311.0	304.0	314.0
Nose Height	38.0	38.0	40.0	41.0	42.5	44.5	47.0	49.2
Tail Length	185.0	185.0	190.0	170.0	175.0	180.0	175.0	180.0
Tail Width	281.0	288.0	296.0	291.0	301.0	311.0	298.0	308.0
Tail Height	38.0	38.0	40.0	32.0	34.4	36.5	35.0	36.2
Camber	6.0	7.0	7.0	8.0	8.0	8.0	9.0	9.0
Rocker	---	---	---	---	---	---	---	---
Stance Width	440-560	480-600	480-600	480-600	480-600	480-600	500-620	500-620
Insert Quantity	12+12	12+12	12+12	12+12	12+12	12+12	12+12	12+12
Stance Setback	0	0	0	10	10	10	25	25
Edge	1.8mm/stainless							
Sidewall Angle	25°	25°	25°	25°	25°	25°	25°	25°
Sidewall Color	BLUEGREEN							
Running Base	P-TEX3000 Graphite							
Stiffness	4.0 5.2 4.1 N W T	5.0 6.2 5.1 N W T	5.0 6.2 5.1 N W T	6.5 7.6 6.6 N W T	6.5 7.6 6.6 N W T	6.5 7.6 6.6 N W T	7.1 8.6 7.6 N W T	7.1 8.6 7.6 N W T



FEATURES OF THE 26-27 MODEL

- * Newly added EW(Extra-wide) model
- * Full twin shape with progressive triple sidecut design
- * Poplar and bamboo core delivering responsive flex
- * Shock-absorbing polyamide topsheet
- * 12+12 inserts for a wide range of stance width adjustability
- * 1.8mm stainless steel edges

SONICALMACH LT ver.C



The ver.C series takes responsiveness to the next level with carbon ribbons placed beneath the core, enhancing rebound performance.

Combined with a poplar-bamboo hybrid core, this special version delivers a unique balance — soft torsional flex for easy control, yet quick snap and rebound for powerful turns and tricks. All three models share the same effective edge length and sidecut radius, with only the board width varying across the lineup as a wide-size variation.

MODEL	SONICALMACH LT 54 ver.C	SONICALMACH LT 55w ver.C	SONICALMACH LT 56ew ver.C
Overall Length	1540	1550	1560
Effective Edge L.	1220	1220	1220
Contact Length	1180	1180	1180
Waist Width	250	260	270
Sidecut Radius	8700/8300/8700	8700/8300/8700	8700/8300/8700
Sidecut Offset	0	0	0
Nose Length	190.0	195.0	200.0
Nose Width	291.0	301.0	311.0
Nose Height	41.0	42.5	44.5
Tail Length	170.0	175.0	180.0
Tail Width	291.0	301.0	311.0
Tail Height	32.0	34.4	36.5
Camber	8.0	8.0	8.0
Rocker	---	---	---
Stance Width	480-600	480-600	480-600
Insert Quantity	12+12	12+12	12+12
Stance Setback	10	10	10
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°
Sidewall Color	PURPLE	PURPLE	PURPLE
Running Base	P-TEX3000 Graphite 6.8 8.0 7.0 N W T	P-TEX3000 Graphite 6.8 8.0 7.0 N W T	P-TEX3000 Graphite 6.8 8.0 7.0 N W T
Stiffness	---	---	---



FEATURES OF THE 26-27 MODEL

- * Carbon placement beneath the core for quick rebound
- * Available in three width options to match different boot sizes
- * Poplar and bamboo core delivering responsive flex
- * Shock-absorbing polyamide topsheet
- * 12+12 inserts for a wide range of stance width adjustability
- * 1.8mm stainless steel edges

DSPRD Ti type-X ver.S

Born as the “Type-X with ultimate vibration absorption”, the ver.S features a sintered base material applied to the topsheet, pushing the limits of high-speed carving performance. The Type-X series itself is a pure competition model designed for advanced carving, and the sintered top version — ver.S — takes that performance to an even higher dimension.

The Type-X 161 stands out with its larger sidecut radius and wider waist width. Even when the board is set on a higher edge angle than with the Type-R, it maintains smooth edge control without overturning, minimizing drag and allowing a clean, accelerating carve line that drops naturally down the fall line. The Type-X 152 is a pure competition model redesigned specifically for women competitors. Its advanced outline shape allows complete control over turn radius — from short to middle and long turns — offering a truly versatile and precise carving experience.

MODEL	DSPRD Ti type-X 152 ver.S	DSPRD Ti type-X 161 ver.S
Overall Length	1520	1610
Effective Edge L.	1360	1430
Contact Length	1180	1260
Waist Width	236	260
Sidecut Radius	8800/8400/9400	11800/11200/12600
Sidecut Offset	-30	-30
Nose Length	205.0	210.0
Nose Width	296.0	309.0
Nose Height	26.0	30.4
Tail Length	135.0	140.0
Tail Width	276.0	294.0
Tail Height	21.0	24.2
Camber	8.0	10.0
Rocker	---	---
Stance Width	440-560	500-620
Insert Quantity	12+12	12+12
Stance Setback	30	40
Edge	1.8mm/48RCWL	1.8mm/48RCWL
Sidewall Angle	15°	15°
Sidewall Color	BLACK	BLACK
Running Base	IS7500 Graphite	IS7500 Graphite
Stiffness	8.4 9.1 8.6 N W T	9.0 9.7 9.2 N W T



FEATURES OF THE 26-27 MODEL

- * Superior shock absorption from Sintered based material
- * 48 Rockwell high-hardness steel edges
- * New Vario Camber and
- 3D sidecut for enhanced carving dynamics
- * Compact nose-and-tail design maximizing contact length and effective edge

DSPRD Ti type-X ver.P

The Type-X is a pure competition model that elevates high-speed carving on steep terrain to new heights. While evolved from the Type-R, the Type-X emerges as an entirely new, high-performance carving machine.

The Type-X 161 ver.P's distinctive features are its shallow sidecut and wider waist width. This design allows for increased edge angles beyond the Type-R's capabilities while maintaining a controlled turn radius, reducing drag, and enabling fall-line-oriented trajectories. The Type-X 152 ver.P, specifically engineered for women competitors, is a pure competition model. Its redesigned outline enables precise control over turn radius, from short to medium to long. The lightweight polyamide topsheet combined with new rubber-dampening technology delivers an exceptional ride feel.

MODEL	DSPRD Ti type-X 152 ver.P	DSPRD Ti type-X 161 ver.P
Overall Length	1520	1610
Effective Edge L.	1360	1430
Contact Length	1180	1260
Waist Width	236	260
Sidecut Radius	8800/8400/9400	11800/11200/12600
Sidecut Offset	-30	-30
Nose Length	205.0	210.0
Nose Width	296.0	309.0
Nose Height	26.0	30.4
Tail Length	135.0	140.0
Tail Width	276.0	294.0
Tail Height	21.0	24.2
Camber	8.0	10.0
Rocker	---	---
Stance Width	440-560	500-620
Insert Quantity	12+12	12+12
Stance Setback	30	40
Edge	1.8mm/48RCWL	1.8mm/48RCWL
Sidewall Angle	15°	15°
Sidewall Color	BLACK	BLACK
Running Base	IS7500 Graphite	IS7500 Graphite
Stiffness	8.2 8.9 8.4 N W T	8.8 9.5 9.0 N W T



26-27 MODEL FUNCTION

- * Superior shock absorption from Polyamide topsheet and rubber combination
- * 48 Rockwell high-hardness steel edges
- * New Vario Camber and
- 3D sidecut for enhanced carving dynamics
- * Compact nose-and-tail design maximizing contact length and effective edge



DSPRD Ti type-R

A high-end hammerhead model offering outstanding edge rotation and turning performance — allowing riders to control their turn radius freely and precisely.

The DSPRD Type-R embodies exceptional carving ability through its unique hammerhead theory-based tapered shape, vario camber, and multi-radius sidecut design. Multiple curves are also applied to the nose up-arc, ensuring smooth snow contact and control during edge transitions. A 0.4mm titanium sheet, trimmed in an X-shape and positioned beneath the topsheet, provides balanced torsional stiffness — firm yet not overly rigid. Designed for high-speed carving, the Type-R represents the ultimate evolution of the premium hammerhead concept.

MODEL	DSPRD Ti type-R_IIn	DSPRD Ti type-R_III	DSPRD Ti type-R_IIw	DSPRD Ti type-R_IV	DSPRD Ti type-R_IVw	DSPRD Ti type-R_Vw	DSPRD Ti type-R_Vew	DSPRD Ti type-R_VI	DSPRD Ti type-R_View	DSPRD Ti type-R_VII	DSPRD Ti type-R_View	
Overall Length	1540	1550	1560	1590	1600	1660	1670	1720	1730	1780	1790	
Effective Edge L.	1390	1390	1390	1430	1430	1490	1490	1550	1550	1610	1610	
Contact Length	1220	1220	1220	1260	1260	1320	1320	1380	1380	1440	1440	
Waist Width	238	246	254	248	256	256	270	260	273	260	276	
Sidecut Radius	9000/8600/9600/8400/9000/8600/9600/9200/9600/9200/12800/12200/13200/12600/15600/14800/15600/14800/18200/17200/18200/17200/18200/17200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200	9000/8600/9600/9200/9600/9200/10200/10200/13600/14000/16400/16400/19200/19200
Sidecut Offset	-30	-30	-30	-30	-30	-30	-30	-30	-30	-30	-30	
Nose Length	195.0	200.0	205.0	200.0	205.0	205.0	210.0	205.0	210.0	205.0	210.0	
Nose Width	298.0	306.0	314.0	307.0	315.0	304.0	316.0	303.0	316.0	300.0	316.0	
Nose Height	24.0	25.7	28.0	25.7	28.0	28.0	30.0	28.0	30.0	28.0	30.0	
Tail Length	125.0	130.0	135.0	130.0	135.0	135.0	140.0	135.0	140.0	135.0	140.0	
Tail Width	279.0	287.0	295.0	289.0	297.0	290.0	303.0	290.0	303.0	289.0	305.0	
Tail Height	19.3	20.9	22.5	20.9	22.5	22.5	24.0	22.5	24.0	22.5	24.0	
Camber	9.0	9.0	9.0	10.0	10.0	12.0	12.0	12.0	12.0	12.0	12.0	
Rocker	---	---	---	---	---	---	---	---	---	---	---	
Stance Width	440-560	500-620	500-620	500-620	500-620	500-620	500-660	500-620	500-660	500-620	500-660	
Insert Quantity	12+12	12+12	12+12	12+12	12+12	12+12	14+14	12+12	14+14	12+12	14+14	
Stance Setback	30	30	30	40	40	60	60	60	60	60	60	
Edge	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	
Sidewall Angle	25°	25°	25°	25°	25°	15°	15°	15°	15°	15°	15°	
Sidewall Color	NEON RED	NEON RED	NEON RED	NEON RED	NEON RED	NEON RED	NEON RED	NEON RED	NEON RED	NEON RED	NEON RED	
Running Base	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	
Stiffness	8.0 8.7 8.2 N W T	8.4 9.1 8.6 N W T	8.6 9.3 8.8 N W T	8.6 9.3 8.8 N W T	8.7 9.4 8.9 N W T	8.7 9.4 8.9 N W T	8.7 9.4 8.9 N W T	8.8 9.5 9.0 N W T	8.8 9.5 9.0 N W T	8.9 9.5 9.1 N W T	8.9 9.5 9.1 N W T	



FEATURES OF THE 26-27 MODEL

- * New EX(Extra-wide) model added to V,VI,VI
- * IIn (Narrow) model introduced in III for women and riders with smaller feet
- * Wide-waist options available for III and IV
- * PE topsheet + X-shaped 0.4t Titanal plate
- * 48 Rockwell high-hardness steel edges
- * New Vario Camber and triple sidecut radius for an unprecedented level of riding

DSPRD Ti [iz]



A new Hammerhead model featuring an innovative construction that combines Toyobo's IZANAS® Ultra-High-Strength Polyethylene fiber and polyamide topsheet.

The new IZANAS® material is strategically placed under the core, while the polyamide topsheet provides superior shock absorption. A Titanal ribbon along the upper edge merges the metal's stability with IZANAS®'s controlled rebound. This unique combination of glass, metal, and IZANAS® creates an unprecedented riding sensation.

MODEL	DSPRD Ti [iz]_I	DSPRD Ti [iz]_IIIn	DSPRD Ti [iz]_II	DSPRD Ti [iz]_IIw	DSPRD Ti [iz]_III	DSPRD Ti [iz]_IIIw	DSPRD Ti [iz]_IVw	DSPRD Ti [iz]_IV	DSPRD Ti [iz]_Vw			
Overall Length	1460	1510	1520	1540	1570	1576	1610	1630	1660			
Effective Edge L.	1250	1310	1310	1330	1360	1360	1400	1405	1450			
Contact Length	1120	1180	1180	1200	1230	1230	1270	1270	1310			
Waist Width	230	232	244	252	246	252	256	244	262			
Sidecut Radius	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800	8200/7600/8840/8200/8840/8200/9200/8600/9240/9240/9600/10400/10400/11600/10800/11600/10800/12200/12200/12800
Sidecut Offset	-20	-20	-20	-20	-20	-20	-20	-30	-30	-30	-30	
Nose Length	180.0	175.0	180.0	180.0	180.0	183.0	180.0	195.0	185.0	195.0	185.0	
Nose Width	278.0	282.0	294.0	301.0	293.0	299.0	301.0	289.0	307.0	289.0	307.0	
Nose Height	38.9	38.9	38.9	38.9	38.9	39.1	38.9	45.5	41.0	45.5	41.0	
Tail Length	160.0	155.0	160.0	160.0	160.0	163.0	160.0	165.0	165.0	165.0	165.0	
Tail Width	272.0	275.0	287.0	295.0	287.0	293.0	293.0	281.0	299.0	281.0	299.0	
Tail Height	30.8	30.8	30.8	30.8	30.8	31.2	30.8	32.6	32.8	32.6	32.8	
Camber	8.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	
Rocker	---	---	---	---	---	---	---	---	---	---	---	
Stance Width	420-540	440-560	460-580	500-620	500-620	500-620	500-620	500-620	520-640	520-640	520-640	
Insert Quantity	12+12	12+12	12+12	12+12	12+12	12+12	12+12	12+12	12+12	12+12	12+12	
Stance Setback	30	30	30	30	30	30	40	40	60	60	60	
Edge	1.8mm/stainless											
Sidewall Angle	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	25°	
Sidewall Color	NEON RED											
Running Base	IS7500 Graphite											
Stiffness	7.2 8.2 7.4 N W T	7.4 8.4 7.6 N W T	7.6 8.6 7.8 N W T	7.7 8.7 7.9 N W T	7.8 8.8 8.0 N W T	7.8 8.8 8.0 N W T	8.0 9.0 8.2 N W T	8.0 9.0 8.2 N W T	8.3 9.3 8.5 N W T	8.3 9.3 8.5 N W T	8.3 9.3 8.5 N W T	

FEATURES OF THE 26-27 MODEL

- * Toyobo's IZANAS® UHSPE fiber construction
- * Shock-absorbing polyamide topsheet
- * 12+12 inserts optimized for plate compatibility
- * Base: ISO 7500 Graphite sintered, Die-cut sections: Hi Pex 4M sintered
- * 1.8mm stainless steel edges



DSPRD (micro, mini)



A kids' model featuring full fiberglass construction. This basic Hammer model uses wood and fiberglass construction, offering forgiving flex with snappy rebound.

Built on GRAY Hammerhead series technology, this board combines wood core and fiberglass construction to deliver forgiving flex with snappy rebound. This is a freecarving machine for kids that offers dynamic and pleasant turning performance.

MODEL	DSPRD micro	DSPRD mini
Overall Length	1320	1380
Effective Edge L.	1130	1190
Contact Length	1010	1070
Waist Width	214	220
Sidecut Radius	6500/6200/6800	7200/6800/7600
Sidecut Offset	-20	-20
Nose Length	165.0	165.0
Nose Width	264.0	270.0
Nose Height	34.4	34.4
Tail Length	145.0	145.0
Tail Width	256.0	262.0
Tail Height	25.9	25.9
Camber	6.0	7.0
Rocker	---	---
Stance Width	380-500	400-520
Insert Quantity	12+12	12+12
Stance Setback	20	20
Edge	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°
Sidewall Color	NEON RED	NEON RED
Running Base	IS7500 Graphite	IS7500 Graphite
Stiffness	2.5 3.5 3.0 N W T	4.0 5.0 4.5 N W T



DSPRD micro DSPRD mini

FEATURES OF THE 26-27 MODEL

* ABS top sheet with excellent shock absorption

* Base : ISO 7500 Graphite Sintered, die-cut part: Hi Pex 4M Sintered

* 1.8mm width, stainless steel edge

DESPE WOOD 32, 38, 43



DESPE WOOD, sized for kids to young riders, features soft flex design with fiberglass and poplar wood construction, ideal for beginners learning to carve.

Built on GRAY Hammerhead series technology, this board combines poplar wood core and fiberglass construction to deliver forgiving flex with snappy rebound. A freecarving machine for kids that offers dynamic and pleasant turning performance. The new design features a vario camber with movable contact points.

MODEL	DESPE WOOD 32	DESPE WOOD 38	DESPE WOOD 43
Overall Length	1320	1380	1430
Effective Edge L.	1120	1180	1230
Contact Length	1010	1070	1120
Waist Width	214	220	232
Sidecut Radius	6500/6200/6800	7200/6800/7600	7700/7300/8100
Sidecut Offset	-20	-20	-30
Nose Length	170.0	170.0	170.0
Nose Width	264.0	270.0	284.0
Nose Height	36.5	36.5	36.5
Tail Length	140.0	140.0	140.0
Tail Width	254.0	260.0	272.0
Tail Height	24.9	24.9	24.9
Camber	6.0	6.0	7.0
Rocker	---	---	---
Stance Width	380-460	400-480	420-500
Insert Quantity	10+10	10+10	10+10
Stance Setback	20	20	30
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°
Sidewall Color	BLACK	BLACK	BLACK
Running Base	P-TEX3000 Graphite	P-TEX3000 Graphite	P-TEX3000 Graphite
Stiffness	2.3 3.3 2.8 N W T	3.8 4.8 4.3 N W T	4.8 5.8 5.3 N W T



FEATURES OF THE 26-27 MODEL

* ICP top sheet with excellent shock absorption

* Base : P-Tex 3000 Graphite Sintered

* 1.8mm width, stainless steel edge

DESPE WOOD 48, 53n, 54, 58, 59w, 62, 63w



A full wood Hammerhead model designed for entry-level carving, featuring fiberglass and paulownia/poplar wood construction that delivers both flexibility and lively rebound.

Built on GRAY Hammer series technology, the DESPE WOOD features a wood and fiberglass construction that offers forgiving flex with a snappy rebound. Developed for entry-level carvers, its medium-soft flex enables easy carving at low to medium speeds.

MODEL	DESPE WOOD 48	DESPE WOOD 53n	DESPE WOOD 54	DESPE WOOD 58	DESPE WOOD 59w	DESPE WOOD 62	DESPE WOOD 63w
Overall Length	1480	1530	1540	1580	1590	1620	1630
Effective Edge L.	1280	1320	1320	1360	1360	1400	1400
Contact Length	1176	1220	1220	1254	1254	1300	1300
Waist Width	242	242	252	256	266	258	268
Sidecut Radius	8200/7600/ 8600	8800/8200/ 9200	8800/8200/ 9200	9300/8600/ 9800	9300/8600/ 9800	10200/9400/ 10800	10200/9400/ 10800
Sidecut Offset	-35	-35	-35	-35	-35	-35	-35
Nose Length	167.0	170.0	175.0	178.0	183.0	175.0	180.0
Nose Width	296.0	296.0	306.0	310.0	320.0	310.0	320.0
Nose Height	25.0	25.0	26.0	26.5	29.5	26.0	26.5
Tail Length	137.0	140.0	145.0	148.0	153.0	145.0	150.0
Tail Width	284.0	284.0	294.0	298.0	308.0	299.0	309.0
Tail Height	23.0	24.0	25.0	26.0	28.0	25.0	25.5
Camber	8.0	8.0	8.0	9.0	9.0	10.0	10.0
Rocker	---	---	---	---	---	---	---
Stance Width	440-520	460-540	500-580	520-600	520-600	540-620	540-620
Insert Quantity	10+10	10+10	10+10	10+10	10+10	10+10	10+10
Stance Setback	35	35	35	35	35	35	35
Edge	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless	1.8mm/stainless
Sidewall Angle	25°	25°	25°	25°	25°	25°	25°
Sidewall Color	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK
Running Base	P-TEX3000 Graphite	P-TEX3000 Graphite	P-TEX3000 Graphite	P-TEX3000 Graphite	P-TEX3000 Graphite	P-TEX3000 Graphite	P-TEX3000 Graphite
Stiffness	6.7 N W T 7.7 7.2 3ply 50/50	7.0 N W T 8.0 7.5 2ply 65/35 Poplar Light Core	7.1 N W T 8.1 7.6 3ply 50/50	7.3 N W T 8.3 7.8 2ply 65/35 Poplar Light Core	7.3 N W T 8.3 7.8 2ply 65/35 Poplar Light Core	7.5 N W T 8.5 8.0 2ply 65/35 Poplar Light Core	7.5 N W T 8.5 8.0 2ply 65/35 Poplar Light Core



FEATURES OF THE 26-27 MODEL

- * New wide version added: 59w, 63w
- * Directional shape with progressive triple sidecut radius design
- * ICP topsheet for superior shock absorption
- * Base : P-Tex 3000 Graphite sintered
- * 1.8mm stainless steel edges

QUADRA II



Quadra II is a new-concept pure racing model for expert riders.

All lengths are also available as board-and-plate set pricing with ALLFLEX.


MODEL	QUADRA II 58	QUADRA II 64	QUADRA II 78	QUADRA II 80	QUADRA II 89
Overall Length	1580	1640	1780	1800	1890
Effective Edge L.	1460	1520	1665	1685	1775
Contact Length	1360	1420	1540	1560	1650
Waist Width	190	200	190	200	200
Sidecut Radius	7200/8200/9600	9200/10500/11800	9400/11400/15200	17800/16800/19400	15400/17400/20400
Sidecut Offset	-30	-50	-30	-100	-30
Nose Length	135.0	135.0	145.0	145.0	145.0
Nose Width	260.0	262.0	254.0	250.0	248.0
Nose Height	20.3	20.3	19.9	19.9	19.9
Tail Length	85.0	85.0	95.0	95.0	95.0
Tail Width	238.0	239.0	230.0	229.0	234.0
Tail Height	5.2	5.2	6.4	6.4	6.4
Camber	8.0	10.0	10.0	10.0	12.0
Rocker	---	---	---	---	---
Stance Width	---	---	---	---	---
Insert Quantity	ALLFLEX only	ALLFLEX only	ALLFLEX only	ALLFLEX only	ALLFLEX only
Stance Setback	50	60	80	80	80
Edge	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL
Sidewall Angle	15°	15°	15°	15°	15°
Sidewall Color	BLACK	BLACK	BLACK	BLACK	BLACK
Running Base	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite



★Die-cut nose logo

★The snowboards with full metal construction are prone to bending or breaking under significant flex.

Please note that bending or breaking are not covered by warranty.

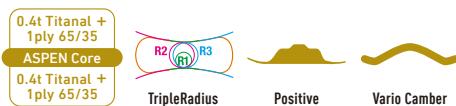

FEATURES OF THE 26-27 MODEL

- * New concept multi-sidecut-radius design
- * Full metal construction with 0.4t Titanal
- * Flex design exclusively for ALLFLEX plate use
- * Rubber sheets on top and bottom for shock absorption

QUADRA



The QUADRA racing series features partial metal construction for women's models and full metal construction for men's models.

The men's model flex is developed specifically for use with ALLFLEX plates. While the women's model is ALLFLEX-compatible, its flex is tuned to deliver optimal performance with various binding plates (ALLFLEX, Vist, or separate plates) based on rider skill level. ALLFLEX plate sets are available at package pricing this season.


MODEL	QUADRA 57	QUADRA 63	QUADRA 72	QUADRA 85
Overall Length	1570	1630	1720	1850
Effective Edge L.	1445	1510	1605	1735
Contact Length	1350	1410	1480	1610
Waist Width	190	200	192	200
Sidecut Radius	9800/9100/10400	10200/9800/10800	14600/13800/15400	18800/17800/20400
Sidecut Offset	-30	-40	-55	-60
Nose Length	135.0	135.0	145.0	145.0
Nose Width	246.0	260.0	242.0	246.0
Nose Height	20.3	20.3	19.9	19.9
Tail Length	85.0	85.0	95.0	95.0
Tail Width	236.0	247.0	228.0	232.0
Tail Height	5.2	5.2	6.4	6.4
Camber	8.0	6.5	6.0	5.5
Rocker	---	---	---	---
Stance Width	420-500	500	420-500	500
Insert Quantity	10+10&AFX	AFX	10+10&AFX	AFX
Stance Setback	50	60	60	80
Edge	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL
Sidewall Angle	15°	15°	15°	15°
Sidewall Color	BLACK	BLACK	BLACK	BLACK
Running Base	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite



★Die-cut nose logo

★The snowboards with full metal construction are prone to bending or breaking under significant flex.

Please note that bending or breaking are not covered by warranty.

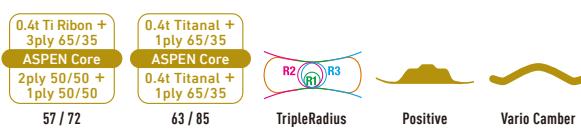

TYCOON Type-S [iz]



The new TYCOON Type-S features a composite construction combining a full metal structure with IZANAS®, an Ultra-High-Strength Polyethylene fiber


The Type-S combines its full metal structure with Toyobo's IZANAS® UHMWPE fiber placed under the core, achieving controlled rebound after flex. This fusion of metal's precision with the resilience of glass and IZANAS® UHMWPE fiber creates an unprecedented riding sensation. Thoroughly tested with various binding systems, it delivers optimal performance with both ALLFLEX and separate plates like VIST. Board-and-plate set pricing available.

MODEL	TYCOON 63 Type-S [iz]	TYCOON 85 Type-S [iz]
Overall Length	1630	1850
Effective Edge L.	1510	1735
Contact Length	1410	1610
Waist Width	200	200
Sidecut Radius	10200/9800/10800	18800/17800/20400
Sidecut Offset	-40	-60
Nose Length	135.0	145.0
Nose Width	260.0	246.0
Nose Height	20.3	19.9
Tail Length	85.0	95.0
Tail Width	247.0	232.0
Tail Height	5.2	6.4
Camber	7.0	6.0
Rocker	---	---
Stance Width	460-540	460-540
Insert Quantity	10+10&AFX	10+10&AFX
Stance Setback	60	80
Edge	1.8mm/48RCWL	1.8mm/48RCWL
Sidewall Angle	15°	15°
Sidewall Color	NEON RED	NEON RED
Running Base	IS7500 Graphite	IS7500 Graphite

★Die-cut nose logo

★The snowboards with full metal construction are prone to bending or breaking under significant flex.

Please note that bending or breaking are not covered by warranty.

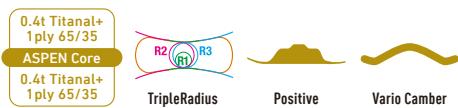

FEATURES OF THE 26-27 MODEL


*63,85 are made of full metal with 0.4t Titanal

*57,72 are made of partial metal (0.4t)

*New rubber sheets are placed on the top and bottom to absorb vibrations

*New sintered top improves vibration absorption and maneuverability

*Progressive triple sidecut radius design

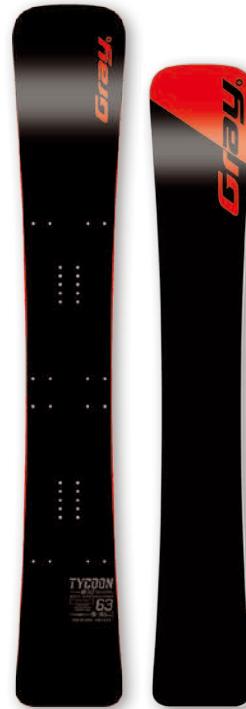

FEATURES OF THE 26-27 MODEL

*Aspen wood core sandwiched between two 0.4mm Titanal layers, top and bottom

*Toyobo's IZANAS® UHSPE fiber placed under the core

*Progressive triple sidecut radius design

*Flex and insert design optimized for multiple plate systems


TYCOON



The well-known construction of metal ribbon + fiberglass + sintered topsheet provides outstanding stability.

GRAY's unique hybrid construction melds metal and fiberglass, capitalizing on the metal's rigidity and the fiberglass's resilience and tenacity. The innovative design maintains exceptional durability while harnessing the best properties of both materials. At higher speeds, the sintered topsheet demonstrates unparalleled vibration absorption, the true value of this design.

MODEL	TYCOON 57	TYCOON 62	TYCOON 67
Overall Length	1570	1620	1670
Effective Edge L.	1445	1495	1545
Contact Length	1350	1400	1430
Waist Width	190	196	196
Sidecut Radius	9800/9100/10400	9900/9200/9900	10200/9800/10200
Sidecut Offset	-30	-30	-35
Nose Length	135.0	135.0	145.0
Nose Width	246.0	256.0	258.0
Nose Height	20.3	20.3	19.9
Tail Length	85.0	85.0	95.0
Tail Width	236.0	247.0	247.0
Tail Height	5.2	5.2	6.4
Camber	8.0	8.0	9.0
Rocker	---	---	---
Stance Width	420-540	460-580	460-580
Insert Quantity	12+12	12+12	12+12
Stance Setback	30	30	35
Edge	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL
Sidewall Angle	15°	15°	15°
Sidewall Color	NEON RED	NEON RED	NEON RED
Running Base	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite

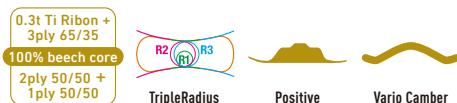

FEATURES OF THE 26-27 MODEL

- *A combination of 0.4mm Titanal and fiberglass optimizes longitudinal and torsional flex
- *The integrated topsheet and sintered base minimize vibration
- *IS7500 Graphite sintered base delivers superior glide performance
- *12+12 inserts for a wide range of stance width adjustability


FORCE



The FORCE is made of wood core and fiberglass, making it easy to handle with great pop. It is an agile and effortless ride.

The FORCE series unites full fiberglass lamination, Vario Camber, and our unique hammerhead shape design. This high-performance model delivers an agile and effortless ride - the signature characteristic of our fiberglass construction.

MODEL	FORCE 57	FORCE 62	FORCE 67
Overall Length	1570	1620	1670
Effective Edge L.	1445	1495	1545
Contact Length	1350	1400	1430
Waist Width	190	196	196
Sidecut Radius	9800/9100/10400	9900/9200/9900	10200/9800/10200
Sidecut Offset	-30	-30	-35
Nose Length	135.0	135.0	145.0
Nose Width	246.0	256.0	258.0
Nose Height	20.3	20.3	19.9
Tail Length	85.0	85.0	95.0
Tail Width	236.0	247.0	247.0
Tail Height	5.2	5.2	6.4
Camber	10.0	10.0	12.0
Rocker	---	---	---
Stance Width	420-540	460-580	460-580
Insert Quantity	12+12	12+12	12+12
Stance Setback	30	30	35
Edge	1.8mm/48RCWL	1.8mm/48RCWL	1.8mm/48RCWL
Sidewall Angle	6°	6°	6°
Sidewall Color	NEON RED	NEON RED	NEON RED
Running Base	IS7500 Graphite	IS7500 Graphite	IS7500 Graphite

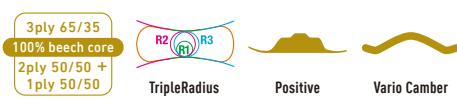

FEATURES OF THE 26-27 MODEL

- *Non-metal unique responsive flex
- *Full wood and full fiberglass-laminated construction
- *IS7500 Graphite sintered base delivers superior glide performance
- *12+12 inserts for a wide range of stance width adjustability

GRAYMAN

S/S T SHIRTS UA-5942/5001

Tough and high-quality comfortable, 6.2oz heavy weight T-shirt.



COLOR: Red, Yellow, Mix Gray
SIZE: S, M, L, XL

120cm - 150cm is made to order.

GRAYRIDE

S/S T SHIRTS UA-5942/5001

Tough and high-quality comfortable, 6.2oz heavy weight T-shirt.



COLOR: Burgundy, Slate, Black
SIZE: S, M, L, XL

120cm - 150cm is made to order.

GRAiENS

S/S T SHIRTS UA-5001

High quality, 5.6oz heavyweight T-shirt.



COLOR: Lavender, Heather Black, Hazy Green
SIZE: S, M, L, XL

120cm - 150cm is made to order.

DRYCOOL

S/S T SHIRTS UA-5900

4.1oz, dry material T-shirt.



COLOR: Indigo, Turquoise, Black
SIZE: S, M, L, XL

120cm - 150cm is made to order.

GRAYg

L/S T Shirts UA-5011

着心地を重視した、5.6ozヘヴィーウエイト・ロングT



COLOR: Dark Camel, Black, Hazy Green
SIZE: XS, S, M, L, XL

TYPO

L/S T Shirts UA-5011

着心地を重視した、5.6ozヘヴィーウエイト・ロングT



COLOR: Acid Blue, Black, Burgundy
SIZE: XS, S, M, L, XL

DRY COOL TEE

L/S T Shirts UA-5089

ファーストレイヤーとしても最適な、ドライシルキー素材のロングスリーブT



COLOR: Black, Cobalt Blue
SIZE: S, M, L, XL

ZIPUP HOODIE

UA-5762

High quality zip up hoodie of 12oz heavyweight material of brushed back.



COLOR: Black, Stone Blue, Mix Gray, Sand Beige
SIZE: S, M, L, XL

Bonded Hoodie

Bonded hoody with water pressure resistance of 7,800 mm. With a water repellent coating, even a little snow and rain can be comfortable riding.



COLOR: Black, Gray
SIZE: S, M, L, XL
* Three-layer bonding fabric
* Waterproof lamination (water pressure resistance 7,800 mm)
* Water repellent coating

RIB WATCH

COLOR:
Black, Charcoal,
Khaki, Orange, Red
SIZE: FREE



COLOR:
Black, Grey,
Light Grey,
Burgundy, Orange
SIZE: FREE

**2way Beanie**

COLOR:
Grey, Black,
Orabge, Beige,
Navy
SIZE: FREE



COLOR:
Dark Gray, Gray,
Blue, Olive,
Mustard
SIZE: FREE

**Smooth Beanie**



CREATE ASSOCIATES Co.,Ltd.

1-6-36 Imazunaka Tsurumi Osaka City Osaka Japan

- * Unauthorized use of photographs, design drawings, text, etc., from this catalog is prohibited.
- * Product specifications, designs, and colors are subject to change without notice.
- * Printed colors on paper may appear different from actual colors.
- * Some sizes may not be available for certain product numbers or colors.

* 2026 CREATE ASSOCIATES Co.,Ltd. All rights reserved.

